



Written, scanned and converted to PDF by HansO, 2001

Interface specification		
Pin. No.	Signal	V0.00 13
1 2 3 4 5 6 7 8 9 10 11 12 13 14	STROBE DATA 1 DATA 2 DATA 3 DATA 4 DATA 5 DATA 6 DATA 6 DATA 7 DATA 8 * BUSY * *	OPERATING INSTRUCTIONS MODE D'EMPLOI MODE D'EMPLOI MODE D'EMPLOI MODE D'EMPLOI
* No Connection		GEBRUING ISTRUZIONI PER LUSU ISTRUZIONI PER LUSU BET JENINGSVEJLEDNING BRUKSANVISNING BRUKSANVISNING KAYTTOOH JE KAYTTOOH JE INSTRUCCIONES DE MANE JO INSTRUCCIONES DE MANE JO MODE DE EMPREGO

Philips Parallel printer interface VU 0040

For Philips VG 8000 and other MSX home computers.


This cartridge can be used in either cartridge slot. It is recommended however that you use the one in the rear which leaves the front slot free for other cartridges.

Insert cartridge with label facing you.

In the rear of the cartridge you will find a socket for your printer cable.

Insert this cartridge only when your MSX home computer is switched off.



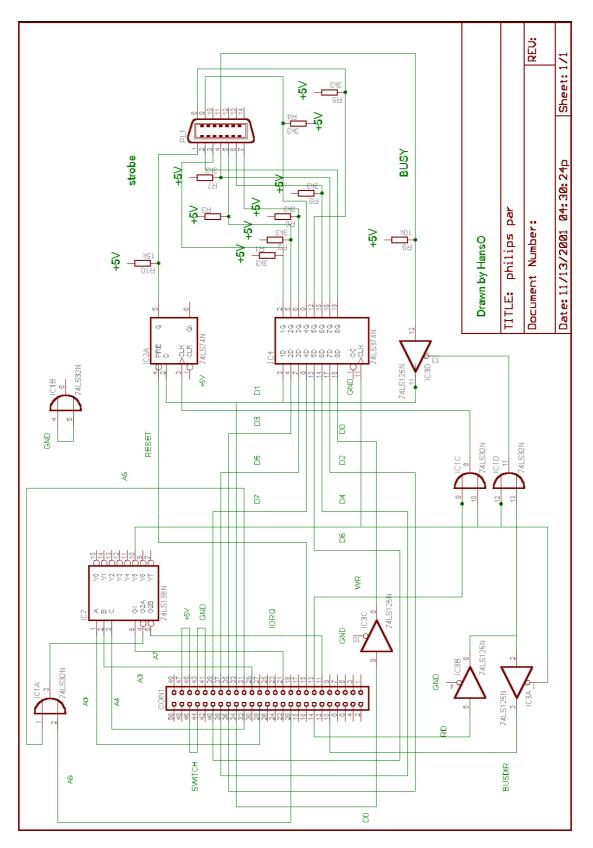

Address decoding

The address decoding around the 74LS138 and IC1A is course: not only 90 and 91 are decoided but also all addresses 9X